

раствора. Дальнейшее совершенствование выбранного научного направления следует проводить в направлении разработки математических моделей оценки уровня загрязнения рабочих зон возле угольного штабеля.

### ЛИТЕРАТУРА:

1. Беляев, Н. Н. Моделирование процесса сноса угольного концентрата из полувагонов / Н. Н. Беляев, А. А. Карпо // Научный вiсник буд-ва: зб. наук. пр. / Харк. нац. ун-т буд-ва та архiт. – Харкiв, 2016. – №1 (83). – С. 196 – 199.
2. Беляев, Н. Н. Проблема уноса угольной пыли / Н. Н. Беляев, М. О. Оладипо // Наука та прогрес транспорту. – 2016. – № 6 (66). – С. 17–24. doi: 10.15802/stp2016/90450.
3. Беляев, Н. Н. Моделирование загрязнения атмосферного воздуха выбросами автотранспорта на улицах городов: монография / Н. Н. Беляев, Т. И. Русакова, П. С. Кириченко. – Д. : Акцент ПП, 2014. – 159 с.
4. Берлянд, М. Е. Прогноз и регулирование загрязнения атмосферы / М. Е. Берлянд. – Ленинград: Гидрометеиздат, 1985. – 273с.
5. Бруязцкий, Е. В. Теория атмосферной диффузии радиоактивных выбросов / Е. В. Бруязцкий. – Киев: Ин-т гидромеханики НАН Украины, 2000. – 443 с.
6. Колесник, В. Е. Математическое моделирование процесса рассеивания промышленной пыли в атмосфере / В. Е. Колесник, Л. А. Головина, В. В. Богуцкая // Зб. наук. пр. НГУ № 26, Том. 2. – Дніпропетровськ: РВК НГУ, 2006. – С. 120–130.
7. Уорк, К. Загрязнение воздуха. Источники и контроль / К. Уорк, С. Уорнер. – Москва: Мир, 1980. – 539 с.
8. Mrinal K. Ghose Emission factors for quantification of dust in Indian coal mines. *Journal of Scientific @ Industrial Research*, Vol.63, September 2004, pp. 763 -768
9. Numerical Simulation of Airflow Structure and Dust Emissions behind Porous Fences Used to Shelter Open Storage Piles /Chong – Fang, Lin Pang, Jun-Ji Cao, Ling Mu, Hui-Ling, Bai, Xiao-Feng Liu. *Aerosol and Air Quality Research*, 14: 1584 -1592, 201.
10. Simultaneous CFD evaluation of wind flow and dust emission in open storage piles /I.Diego, A. Pelegry, S. Torno, J. Torano, M. Menendez // *Applied Mathematical Modeling* 33 (2009), 3197 – 3207.

Рецензент: д-р техн. наук В.О. Юрченко

УДК [504.3: 622.411.52]: 656.2

**Biliaiev M.M., Kozachyna V.A., Oladipo Mutiu Olatoye**

*Dnipropetrovsk National University of Railway Transport named after academician V. Lazaryan*

### DUST FROM COAL TRAINS: REDUCING OF ENVIRONMENTAL POLLUTION IN WORK PLACES NEAR RAILWAY

**Introduction.** Coal trains have sensitive impact on environmental pollution [1-7]. Emission from trains causes pollution of working places near the railway, pollution of ballast layer and also results in cargo loses. Intensive emission takes place along the first 300-500 km run of coal train. That is why the problem of coal dust reduction is still of great interest. To solve this problem different methods are used [1-3]. For example: watering of

coal surface, usage of special solutions which cover the coal surface, usage of covers, canvases, formation of special coal pile shape in the wagon etc. Every method has its advantages and its disadvantages but the process of finding convenient and not expensive methods is still going on.

Emission from coal trains depends on many factors [3-7], many of them are out of control during coal transportation. **The goal**

of the study performed was evaluation of additional boards application for reduction of coal dust emission from the wagon. As one of the main factors, which influence the coal dust emission, is the local wind velocity (velocity near the coal surface) we decided to reduce the coal dust emission by reduction this factor. To reduce velocity it is necessary to influence the aerodynamic regime near the coal surface in the wagon.



Fig. 1. Coal dust emission from the wagon

**Experimental setup.** We carried out experiments at the laboratory of Hydraulics and Water Supply (National University of Railway Transport named after academician V. Lazaryan) using not expensive equipment. The goal of the experiments was visualization of contaminated zone near the models of the coal wagon with different form of additional boards. Sketch of experimental setup is shown in Fig. 2.

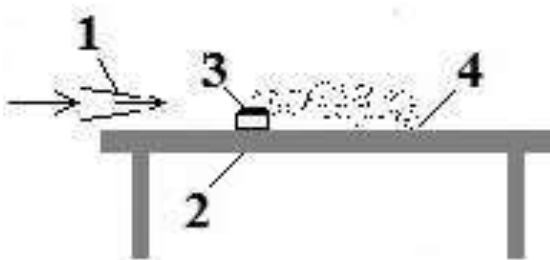


Fig. 2. Sketch of experimental setup: 1 – fan; 2 – table; 3 – model of the wagon; 4 – contaminated zone.

The model of the wagon was made in scale 1:100 and this model represented the real wagon № 12-1592. As the dynamic criteria, the Reynolds number was used. The air velocity during the experiments was 7,5-17,4 m/sec. During the experiments, we took photos of contaminated zones, which were formed near the model. After each experiment the coal dust, which had fallen on the

surface of the table, was weighted.

**Results.** The experiments, which were performed, simulate four different cases.

**Case 1 (basic case).** At the first step of our work, we studied the process of formation of contaminated zone near the model of poorly loaded wagon with coal. Sketch of the wagon (cross section) is shown in Fig. 3.

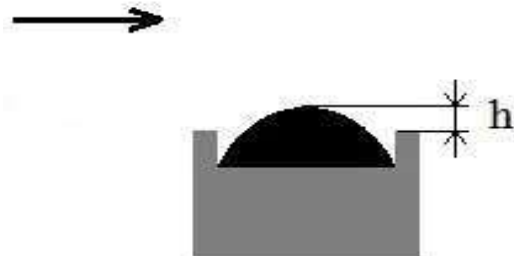


Fig. 3. Sketch of poorly loaded wagon (cross section)

Model of this wagon is shown in Fig. 4a. The results of the experiment are shown in Fig.4b.

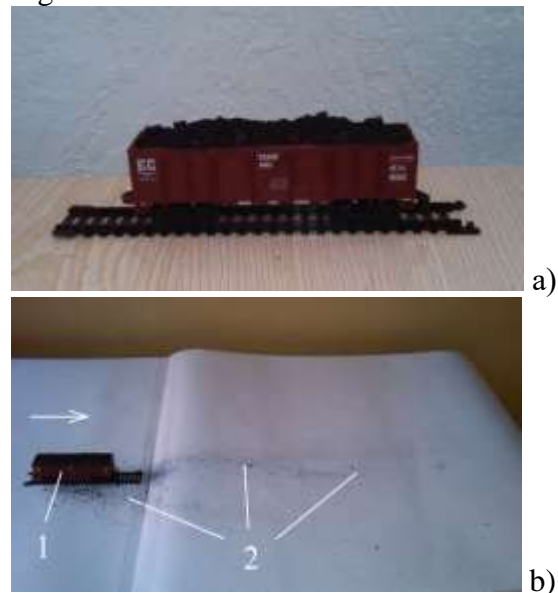


Fig. 4. a) Model of poorly loaded wagon; b) Contaminated zone near poorly loaded wagon: 1 – model of the wagon; 2 –contaminated zone

As we can see from Fig. 4b, the contaminated zone near the wagon is large. It covers not only the railway track but also the nearby territory. The black color of this zone indicates on intensive coal deposition, which means the high intensity of coal dust emission from the model. The length of this zone is about six lengths of the wagon. The width of the contaminated zone is about three - four lengths of the wagon.

**Case 2.** At the next step, we studied the process of coal dust emission from the model,

which had additional vertical boards that are higher the real boards of the wagon (Fig.5).

As we can see from Fig. 6b, the intensity of contaminated zone is less than in case 1 but its dimensions are still large. The form of the contaminated zone is like the form of contaminated zone in basic case 1.

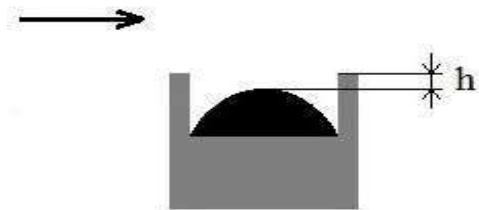


Fig. 5. Sketch of wagon with additional vertical boards

Model of this wagon is shown in Fig. 6a and results of the experiment are shown in Fig. 6 b.

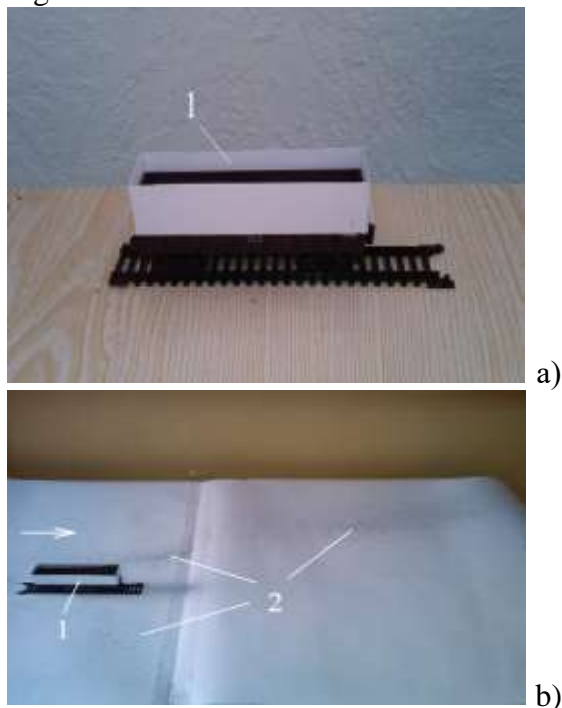


Fig. 6. a) Model of wagon with additional vertical boards: 1 – vertical boards; b) Contaminated zone near wagon with additional vertical boards: 1 – wagon; 2 – contamination zone

**Case 3.** At the next step, we studied the process of coal dust emission from the model with additional vertical boards, which we called “wings”. Sketch of these boards is shown in Fig.7. These boards partly covered top of the wagon.

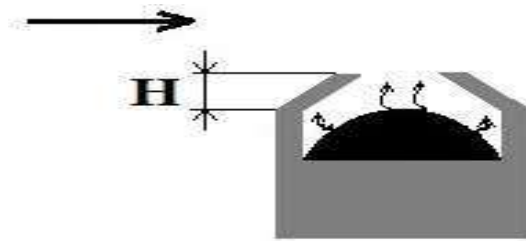


Fig. 7. Sketch of wagon with additional vertical boards “wings” (cross section)

Model of this wagon is shown in Fig. 8a and results of the experiment are shown in Fig. 8b.

As we can see from Fig. 8b, the contaminated zone is much less than in basic case 1. This zone is short.

**Case 4.** At the next step, we studied the process of coal dust emission from the model with additional vertical boards, which we called “internal wings” (Fig. 9).

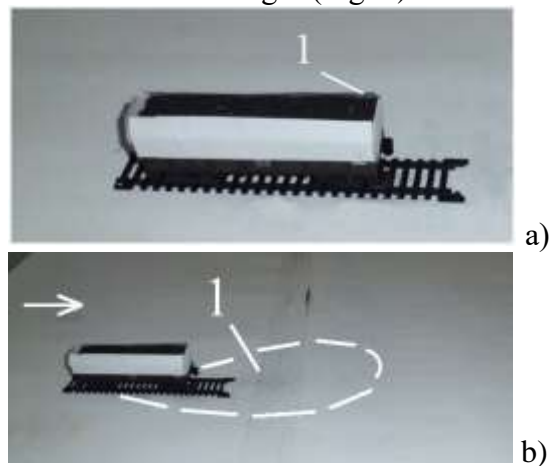


Fig. 8. a) Model of wagon with additional vertical boards “wings”: 1 – “wings”; b) Contaminated zone near wagon with additional vertical boards “wings”: 1 – contamination zone

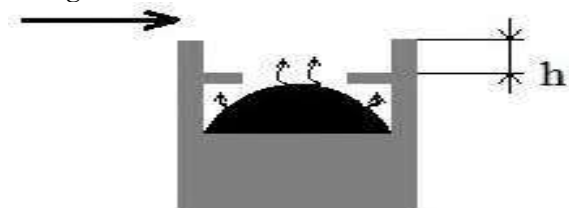


Fig. 9. Sketch of wagon with additional vertical boards “internal wings”

Model of this wagon is shown in Fig. 10a and results of the experiment are shown in Fig. 10b.

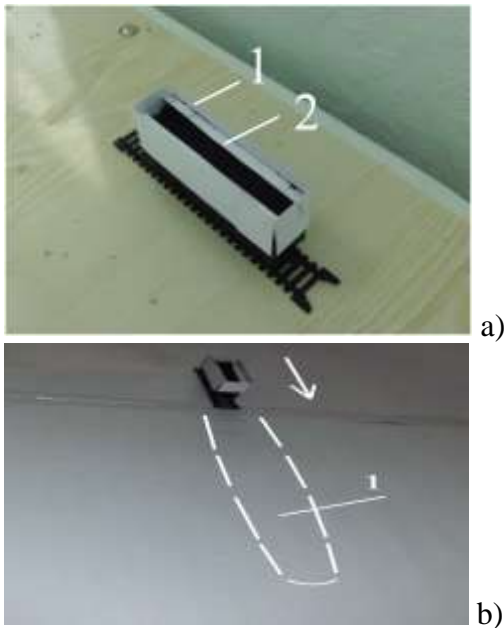


Fig. 10. a) Model of wagon with additional vertical boards “internal wings”: 1 – vertical board; 2 – “internal wing”; b) Contaminated zone near wagon with additional boards “internal wings”: 1 – contaminated zone

As we can see from Fig.10b, the contaminated zone is much less than in basic case 1. This zone is short and narrow.

In Table 1, we present some results about the coal dust mass, which has fallen on the surface for every type of the additional boards.

It is clear that the results shown in Table 1 are the “pilot” ones but they help to develop some strategy to reduce coal dust emission from wagons with low cost. Varying dimensions of additional boards it is possible to reduce environment pollution near railways during coal transportation.

Table 1 - Coal dust mass, which has fallen on the surface

Type of the additional boards	No additional boards, poorly loaded wagon (case 1)	Vertical boards (case 2)	Boards “wings” (case 3)	Boards “internal wings” (case 4)
Mass of collected dust	117 mg	97 mg	76 mg	68 mg

**Conclusions.** Application of additional vertical boards, which were considered

above, allows reducing environment pollution near the railways due to minimization of coal dust emission. Implementation of additional vertical boards is not expensive and installation of the boards does not take much time. Further investigations of this work will be directed to the development of CFD models to study the process of environmental pollution numerically.

REFERENCES:

1. Беляев Н.Н. Минимизация интенсивности выноса пыли из полувагона при транспортировке угля / Н.Н. Беляев, Оладипо Муту Олатойе // Научный журнал «Электромагнитная сумисність та безпека на залізничному транспорті». Д.: ДНУЗТ, 2016. – № 11. – С.93 – 100.
2. Беляев Н.Н. Модели оценки уровня загрязнения атмосферы при транспортировке сыпучих грузов / Н.Н. Беляев, М.О. Оладипо // Наука та прогрес транспорту. Вісн. ДНУЗТ. – 2016. – Вип. 5 (65). – С. 22–29.
3. Ferreira A.D. Full-scale measurements for evaluation of coal dust release from train wagons with two different shelter covers / A.D. Ferreira, Viegas D.X., Sousa A.C.M. // Journal of Wind Engineering and Industrial Aerodynamics, 2003. – Vol. 91(10). – P. 1271-1283.
4. Final Report on the Independent Review of Rail Coal Dust Emissions Management Practices in the NSW Coal Chain / NSW Chief Scientist & Engineer, 2016. – 23 p.
5. Katestone Environmental Pty Ltd. Literature Review of Coal Train Dust Management Practices. Prepared for NSW Environment Protection Authority / Katestone Environmental Pty Ltd., 2014. – Milton, Australia – 112 p.
6. NSW EPA. Environment compliance report: Compliance audit of coal train loading and unloading facilities / NSW Environment Protection Authority, 2014. – Sydney, Australia. – 50 p.
7. Robert Kotchenruther. Fugitive Dust from Coal Trains. Factors Effecting Emissions & Estimating PM2.5. / Robert Kotchenruther // EPA Region 10, NW –AIRQUEST, 2013. – 18 p.

Рецензент: д-р техн. наук В.О. Юрченко